Huot Mfg. Co., 550 No. Wheeler St., St. Paul, MN 55104 / https://www.huot.com/

HUOT Drawer Removal Instructions

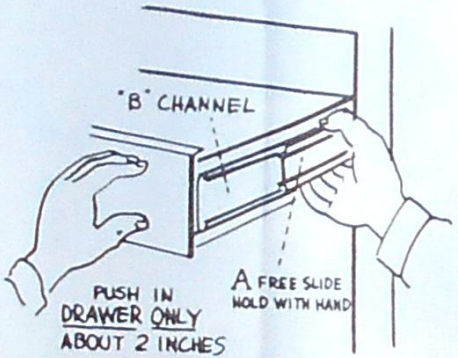

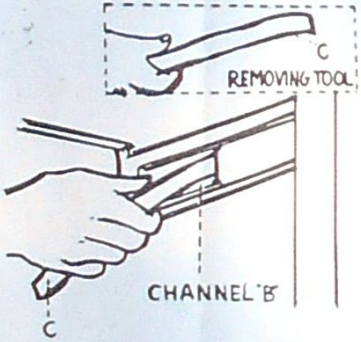

TO REMOVE DRAWER:

1. Pull drawer out to its full length.
2. Grasp "A" (free moving slide) so that it does not move, and while holding in this position, with the other hand, PUSH THE DRAWER ONLY in about two inches.
3. Using a flexible piece of metal, "C" (such as a piece of carton strapping steel), about 15 inches long and ½ inch wide, with a slight bend on one end, insert this removing tool "C" with the bend to the OUTSIDE, in the space between "A" and "B" the chanel on the drawer. Push in the removing tool 6 or 7 inches or as far as necessary to bypass safety catch, see illistration.
4. When end of tool has bypassed safety catch you will be able to push the slide "A" in until the end is flush with the front of the chest.
5. Repeat the above operations on the other side and at this point you should be able to pull the drawer free of the slides.

The safety catch may be compressed in shipment and allow the drawer to fall out. Pull catch out slightly and insert drawer.